



PT MULTI MAKMUR TEKNIKATAMA

FOTEK



CNT-HC Series



www.multimakmur.co.id



Multi Makmur Teknikatama

**HC
series**



**DIN 72 X 72
Digital Counter**



- * Hi-power supply : 100mA/12VDC
- * Hi-speed response time : 0.2ms
- * Hi-reliability with hi-anti-noise circuit.
- * Easy to test with input pilotlamp.
- * Easy to longer distance monitor with large size LED display.
- * Long time memory with Ni-Cd battery.




■ Illustration

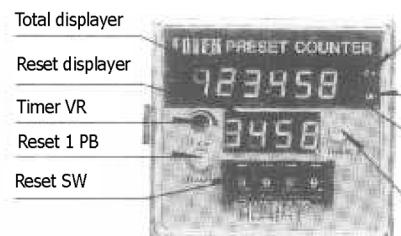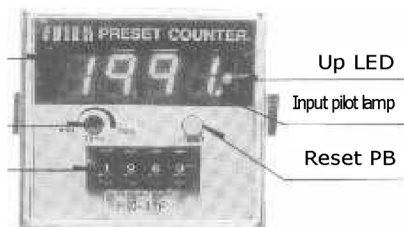


■ Outline & Fixed Hole

Outline

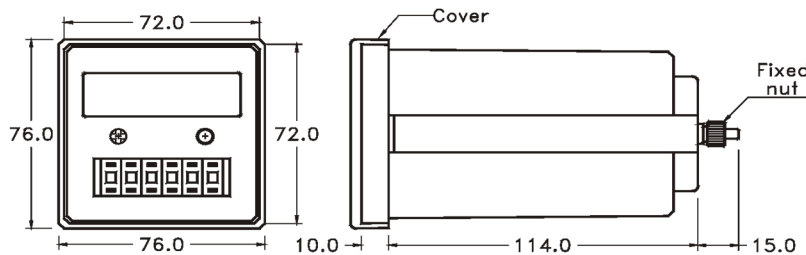

Fixed Hole

<Thickness 1~8mm>



PT MULTI MAKMUR TEKNIKATAMA

Phone: +62 21 54350091 | +62 21 54350092 | +62 21 54350181

Mobile WA: +62 878 6314 1371 | **Fax:** +62 21 54350182


Email: admin@multimakmur.co.id | **Website:** www.multimakmur.co.id







A/B Slide Switch < Response Time Selected >

Counting	L→H	$0V \leq L < 2V$, $6V \leq H < 30$ / Enabling Current $< I_e > < 3mA/12V$
Mode " A "	2.5K CPS	Cycle Duty Ratio 1:1 , Suited for Solid State Input Such As CMOS , TTL or Transister etc.
Mode " B "	60 CPS	Response Time $< 15ms$, Suited for Contact input Such As Limit Sw , Relay or Reed SW etc.

N/R/C Slide Switch < Output Control Selected >

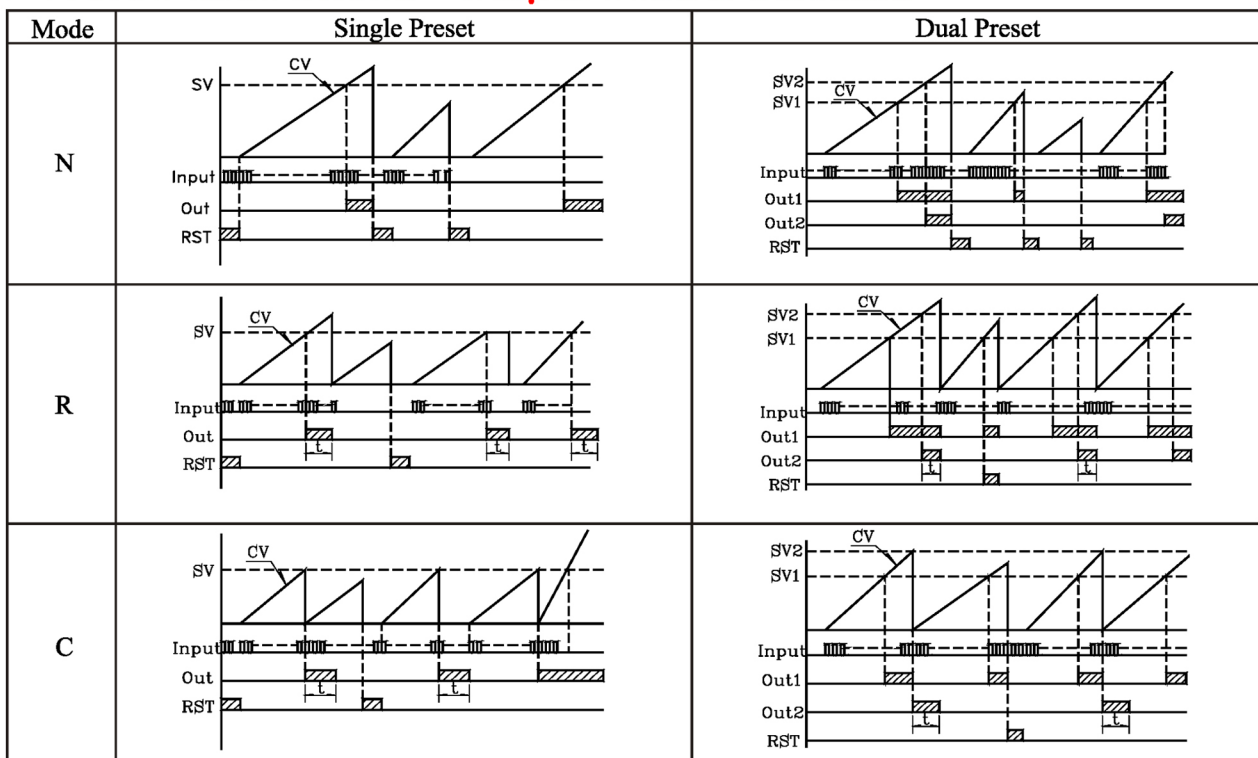

Connection Diagram

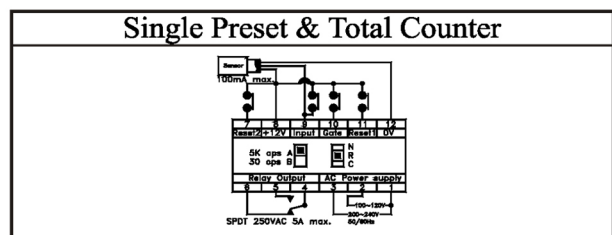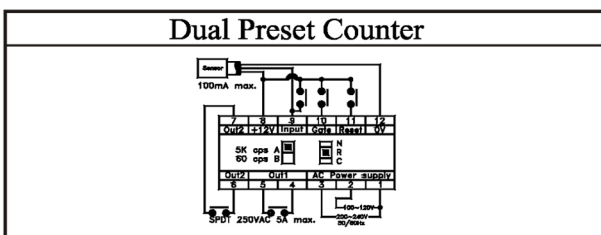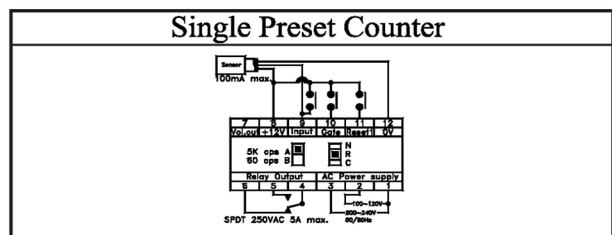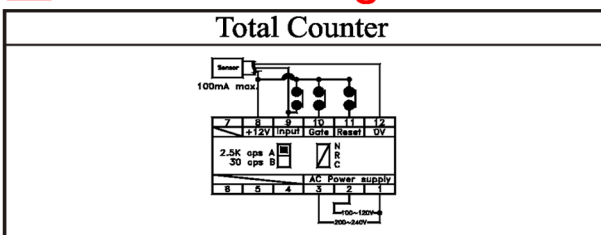

PT MULTI MAKMUR TEKNIKATAMA

Phone: +62 21 54350091 | +62 21 54350092 | +62 21 54350181

Mobile WA: +62 878 6314 1371 | Fax: +62 21 54350182

Email: admin@multimakmur.co.id | Website: www.multimakmur.co.id



**HC
series**

**DIN 72 X 72
Digital Counter**



■ Total Counter



Model	HC-4T	HC-5T	HC-6T
Nr. of displayer	4 digits	5 digits	6 digits
Display range	0000~9999	00000~99999	000000~999999
Display method	0.56" 7-segment red LED	0.36" 7-segment red LED	
Response frequency	Contact input < 60 cps ; Non-contact input < 2.5K cps		
Operating voltage	110/220VAC ±20% , 50/60Hz		
Current Consumption	5VA max.		
Weight	Approx.650g.		


■ Single Preset Counter




Model	HC-21P	HC-31P	HC-41P	HC-51P	HC-61P
Nr. of displayer	2 digits	3 digits	4 digits	5 digits	6 digits
Setting range	1~99	1~999	1~9999	1~99999	1~999999
Display method	0.56" 7-segment red LED		0.36" 7-segment red LED		
Response frequency	Contact input < 60 cps ; Non-contact input < 2.5K cps				
Output method	Relay output 1a / 1b , 5A/250VAC max. Voltage output PNP , 150mA max.				
Output control	N.R.C. control				
Operating voltage	110/220VAC +20% , 50/60Hz				
Current Consumption	5VA max.				
Weight	Approx.650g.				

■ Interface Circuit

Voltage Output < 7th Pin >



Input < 9th Pin >



PT MULTI MAKMUR TEKNIKATAMA

Phone: +62 21 54350091 | +62 21 54350092 | +62 21 54350181

Mobile WA: +62 878 6314 1371 | Fax: +62 21 54350182

Email: admin@multimakmur.co.id | Website: www.multimakmur.co.id



Dual Preset Counter



Model	HC-42P	HC-52P	Standard type : 1st preset output is controlled by 2nd preset output with N.R.C. Optional type : 1st preset output is controlled with one shot < 0.1s > , 2nd preset output is controlled with N.R.C.
Nr.of displayer	4 digits	5 digits	
Setting range	1 st 1~9999 2md 1~9999	1st 1~99999 2nd 1~99999	
Display method	0.36" 7-segment red LED		
Response frequency	High Speed<2.5K cps ; Low Speed<60 cps		
Output method	Two relays , 1a 5A/250VAC		
Output control	N.R.C control		
Operating voltage	110/220VAC± 20% , 50/60Hz		
Current consumption	5VA max.		
Weight	Approx. 700g.		


Single Preset & Total Counter




Model	HC-4P6T	Standard type : The total Counter is synchronously Counting with the preset counter. Optional type : The total Counter Counts when preset counter output.<HC-4P6TA>
Nr.of displayer	Preset 4 digits , total 6 digits	
Display range	0000~9999 & 000000~999999	
Setting range	1~9999	
Display method	0.36" 7-segment red LED	
Response frequency	High Speed<1K cps ; Low Speed<60 cps	
Output method	Relays	
Output control	N.R.C control	
Operating voltage	110/220VAC ± 20% , 50/60Hz	
Current consumption	5VA max.	
Weight	Approx. 700g.	

Interface Circuit

Gate < 10th Pin >



Reset < 11th Pin >

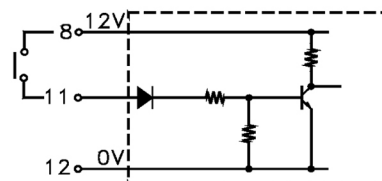

PT MULTI MAKMUR TEKNIKATAMA

Phone: +62 21 54350091 | +62 21 54350092 | +62 21 54350181

Mobile WA: +62 878 6314 1371 | Fax: +62 21 54350182

Email: admin@multimakmur.co.id | Website: www.multimakmur.co.id

