



PT MULTI MAKMUR TEKNIKATAMA

FOTEK



CR-FR Series



www.multimakmur.co.id




Multi Makmur Teknikatama

Type	Standard	Long Distance	High Sensitivity	Two Wires
Model	FR-1	FR-1L	FR-1H	FR-2
Figure				
ON Resistance	< 30K Ω	< 4K Ω	< 70K Ω	< 30K Ω
OFF Resistance	> 60K Ω	> 15K Ω	> 300K Ω	> 60K Ω
Length of Cable	< 1000M	< 4000M	< 50M	< 800M
Weight < Appr >	130g	130g	130g	145g


Specification

Power Supply	AC 110V or 230V or 380V $\pm 20\%$, 50/60Hz
Electrode Voltage	14 VAC
Current Consumption	3VA max.
Output Method	Relay, 5A/250VAC
Response Time	ON<80ms, OFF<160ms
Insulation Resistance	100M Ω /500VDC
Dielectric Strength	2.5KV/1min.
Life of Relay	Mechanical > 2×10^7 Times Electrical > 5×10^6 Times
Circumstance	-20° C~+60° C, 35%~85%RH

Dimension

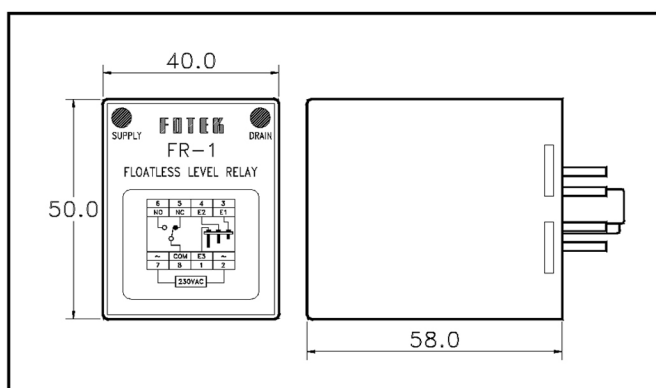

Connection & Diagram

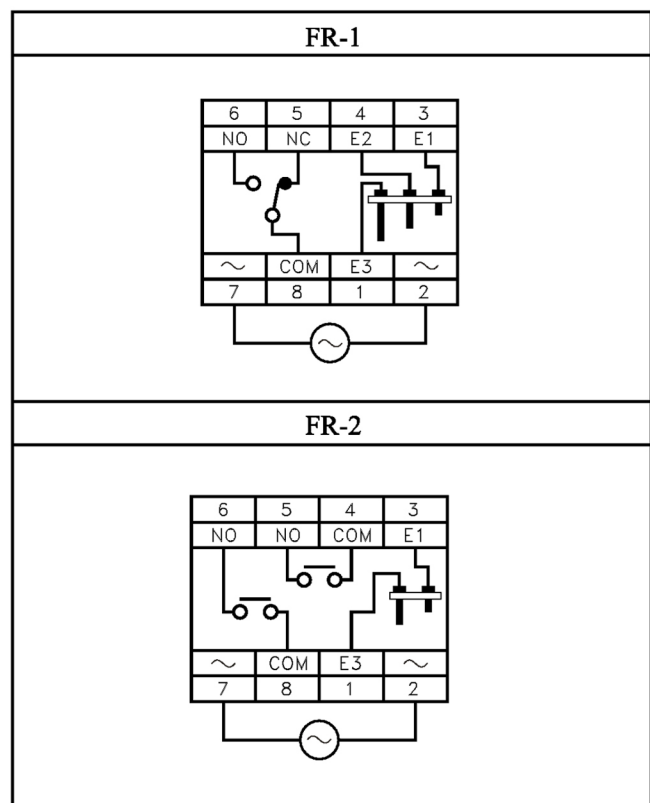

PT MULTI MAKMUR TEKNIKATAMA

Phone: +62 21 54350091 | +62 21 54350092 | +62 21 54350181

Mobile WA: +62 878 6314 1371 | Fax: +62 21 54350182

Email: admin@multimakmur.co.id | Website: www.multimakmur.co.id

